




CORRECT INSTALLATION OF COIL SPRING RUBBER BUFFERS (MANUAL #26)

1

PLACE THE CAR ON THE JACK TO STRETCH THE SPRING

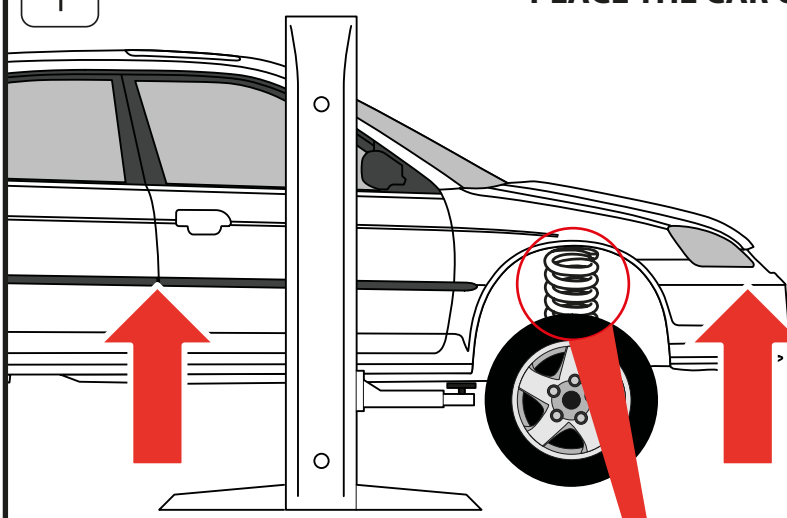


REMEMBER!
THE INSERT ASSEMBLY PROCESS IS PERFORMED WITHOUT DISASSEMBLING THE SPRING.


REMEMBER!
TO MOUNT BUFFERS IN THE SAME HEIGHT AND QUANTITY IN BOTH SIDES OF THE CAR!

2

If lifting the car does not make it possible to mount the insert to the springs, use spring compressors. The pullers must be attached the other way around in order to stretch the spring. It is best to mount them between four turns.

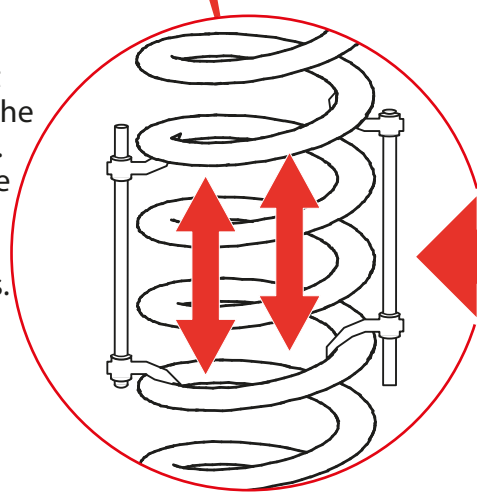


Place the buffer in the middle of the coil spring height, winding it on coils.



3

After lowering the car from the jack, make sure that the collars of the insert are wrapped in the spring.

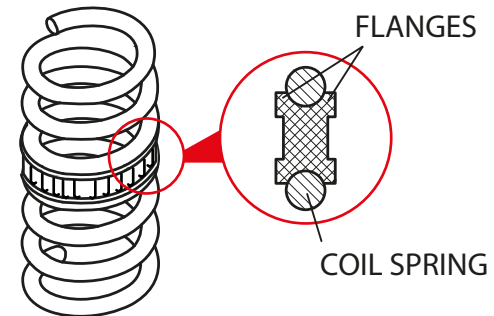

4

Correctly mounted element.

